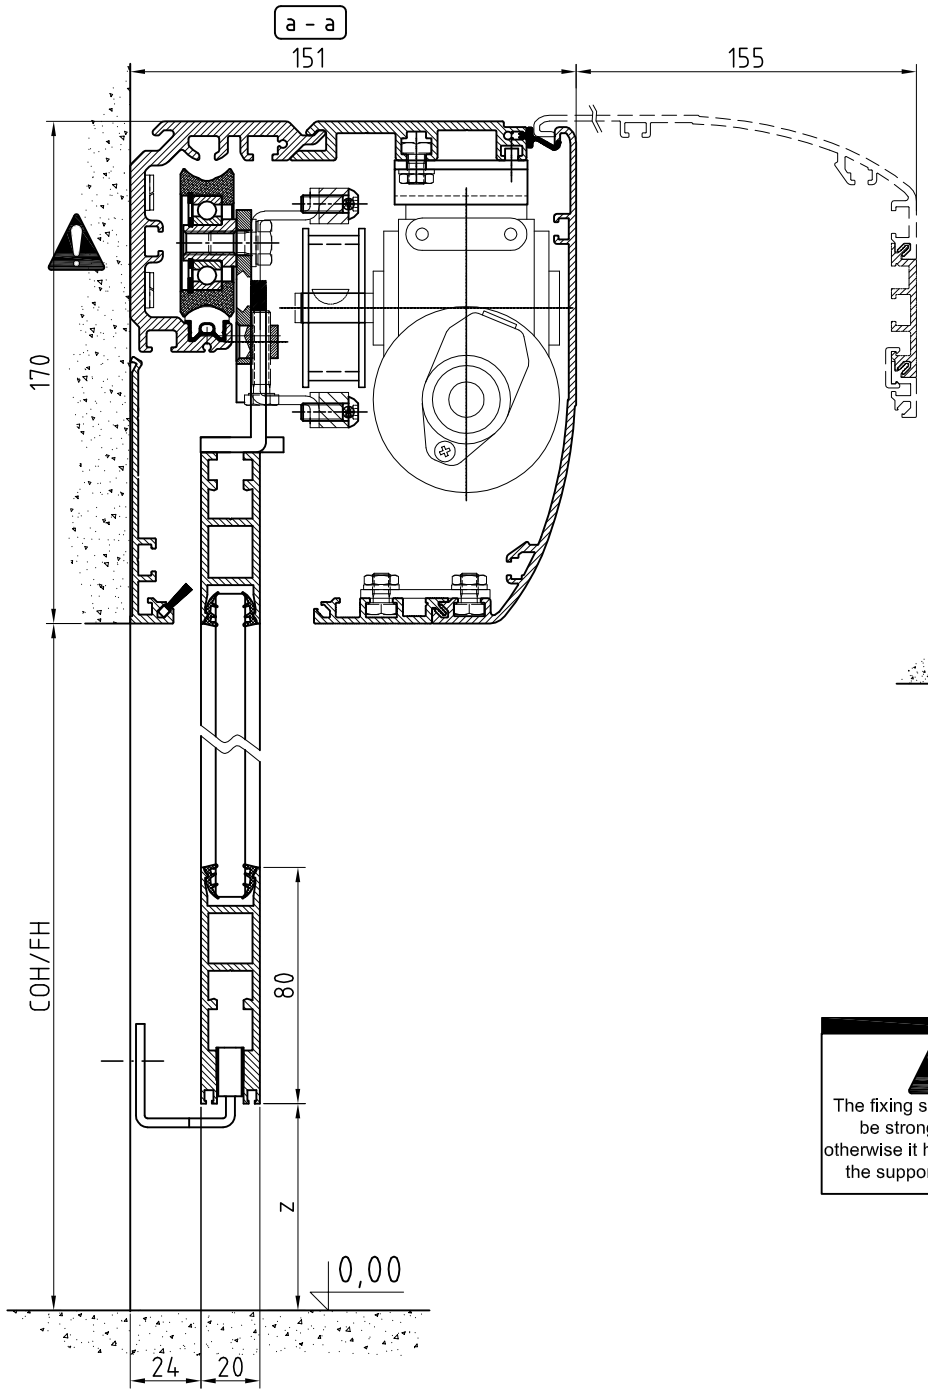

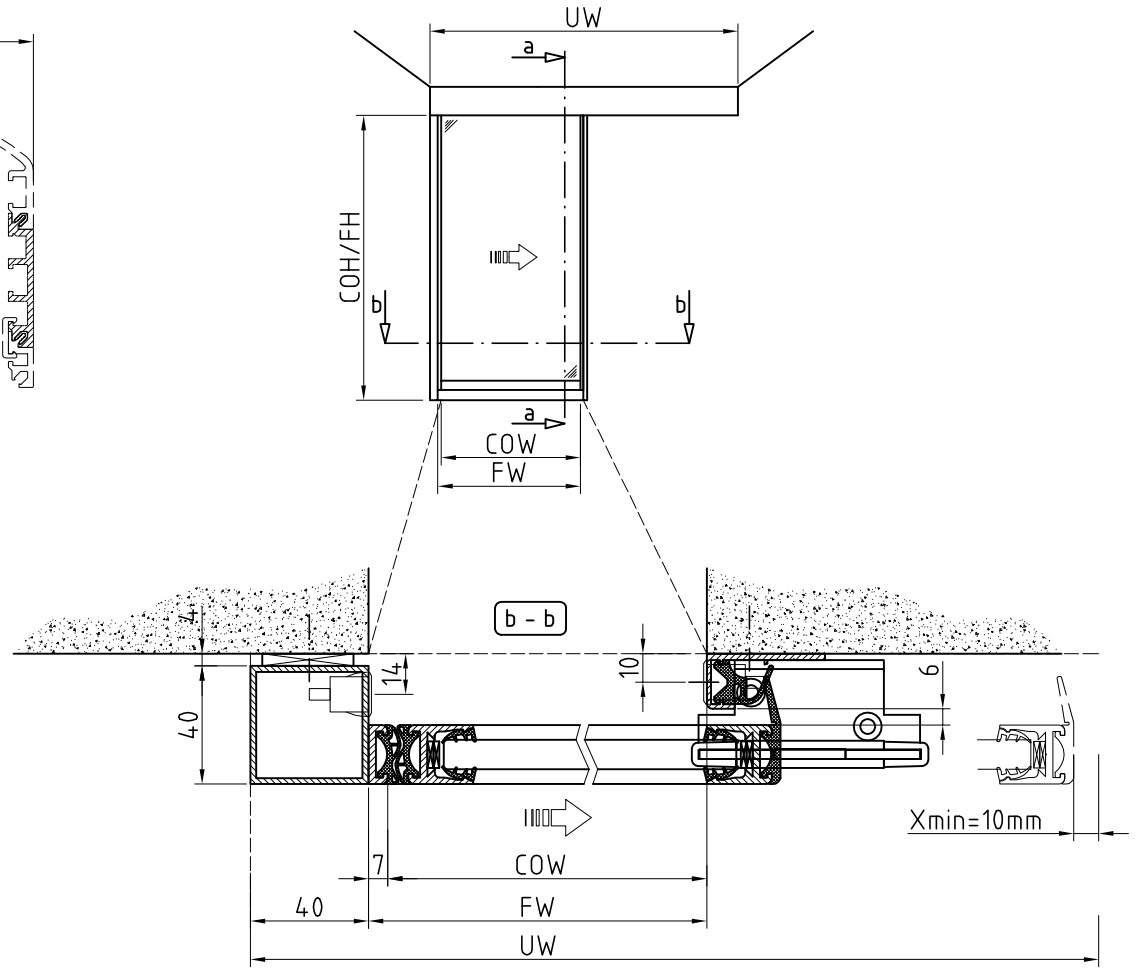

The fixing surface has to be strong enough, otherwise it has to be used the supporting profile!

FW	= Frame width	min. 800 / max. 1200
FH	= Frame height	min. 2000 / max. 2200
COW	= Clear opening width	COW = FW -7
COH	= Clear opening height	COH = FH
UW	= Unit width	UW = (FW*2)+70
X	= Safety distance	Xmin = 10
z	= Wing distance	z = 8 - 70 mm

SURFACE TREATMENT :
- special anodized
- E6AO anodized
- RAL

GLASS :
- laminated 4+4

Tolerance odprtih mer: DIN 7168 srednji razred
Surface

	Date	Name	Signature
Drawn	18.4.2006	A.STUHEC	
Checked			
Standard			

Scale | Position | Quantity

LITE

AUTOMATIC SLIDING DOOR SL200

FLOAT 1W/1S R

doorson

603000003_5

Version 01

Page 01 Pg

State | Changes | Date | Name | Filename